



***Delta 2.0 Intercom
Something worth
whistling about -
no feedback!***



Optimum Communication

DELTA 2.0, Perfect Communication

**The ideal system for Cash Desks,
Porters' Lodges, Embassies,
Night Desks, Ticket Offices,
Exchange Offices, Railway
Stations, Toll Booths, Banks,
Public Authorities...**

Delta 2.0 – modern technology and excellent design

The Delta 2.0 intercom system has been developed specially for glazed counters, where good communication is required between the employee and customer sides.

Delta 2.0 is a 100% free intercom system, i.e. both employee and visitor are able to hear and speak at the same time. Without switching or delays.

Clear, natural and uninterrupted voice transmission in both directions.

The latest digital signal processors ensure clear communication, even in difficult acoustic conditions. There is no feedback.

Inside and outside volumes are individually adjustable on all connected components. Delta 2.0 saves the settings and retrieves them automatically. Thus you always have the optimum volume and the best communication.

Main control has a modern design, plus there is a great choice of compact extensions, loudspeakers and microphones for the customer side. Our range ensures that you can find the optimum solution for any situation.

Installation of the intercom system couldn't be simpler. No specialist knowledge is required. Components are ready to plug in, with no adjustments needed - only the volumes.

Delta 2.0 is designed for up to 4 extensions on the customer side. A pager with gong can be connected, as well as a door opener, telephone receiver, inductive voice transmission modules for hearing aids, and call forwarding to a mobile phone.

On the employee side, up to 4 headsets and additional extensions can be connected.

Delta 2.0 – operate simply and intuitively.

MAIN CONTROL

Simple and intuitive operation



Illuminated Ring

Housing milled from solid aluminium block

Volume Control Customer Side

Volume Control Employee Side

Volume Display Employee Side/ Customer Side

Extensions Customer Side

Extensions Employee Side

Function Button

Door-Opener Button

On/Off Button and Standby



DELTA 2.0, Components

EMPLOYEE SIDE

Desktop Main Control



115 x 185 mm

Order No 200 020 silver


CENTRAL CONTROL

Order No 200 000

**Power Supply 100-240 V,
50-60 Hz
Cable 1,5 m**
Order No 200 010

1,8 m cable
with plug

3 m cable
with plug

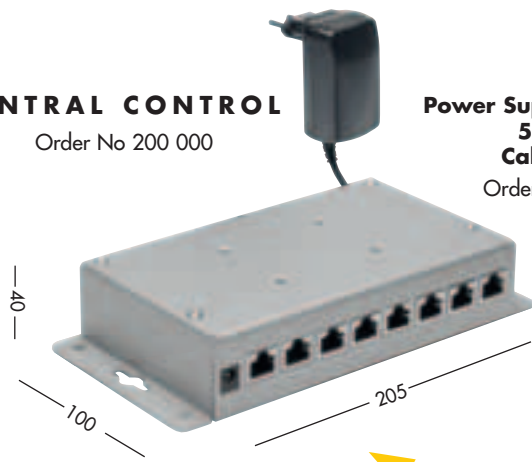

HEADSETS FOR THE MAIN CONTROL

Wireless Monaural Headset



With charger
and docking
station

Order No 200 040 black

OR

Wireless Binaural Headset




With charger
and docking
station

Order No 200 041 black

OR

Headset Charger



For charging
additional
wireless
headsets

5-off charger
shown

1-off Order No 200 060
5-off Order No 200 065

3m Cable
with plug

**Extension Cable
suitable for all
components**

| | |
|-------|------------------|
| 0,5 m | Order No 200 100 |
| 3 m | Order No 200 103 |
| 5 m | Order No 200 105 |
| 10 m | Order No 200 110 |
| 25 m | Order No 200 125 |

ACCESSORIES FOR WIRELESS HEADSETS

Four wireless headsets can be connected to each main control.

Wireless Monaural Headset to be used as secondary device
with an existing charger and docking station
Order number 200 050

Wireless Binaural Headset to be used as secondary device
with an existing charger and docking station
Order number 200 051





ACCESSORIES FOR DELTA 2.0

Induction Loop for hearing aids
Order Number 200 199





Telephone Module to forward the call to a mobile phone
(e.g. for nightshifts in pharmacies)
Order Number 200 190 - available from 2013

Signal Amplifier for additional extensions on the customer side
required from the third extension on the customer side and to connect a door opener
Order Number 200 130
plus additional power supply 100-240 V, 50-60 Hz
Order No 200 010





CUSTOMER SIDE

| | | | |
|---|--|---|--|
| <p>Desktop Extension</p> <p>115 x 185 mm</p> <p>With microphone, loudspeaker and call button</p>  <p>Incl. 3 m cable</p> <p>Order No 200 140 silver</p> | <p>Built-In Extension</p> <p>128 x 188 mm</p> <p>With microphone, loudspeaker and call button</p>  <p>Incl. 3 m cable</p> <p>Order No 200 141 silver</p> | <p>Three Panel Strip</p> <p>With microphone, loudspeaker and call button</p> <p>500</p>  <p>Incl. 3 m cable</p> <p>Order No 200 145 silver</p> | <p>Door Intercom</p> <p>90</p> <p>230</p> <p>50</p> <p>With microphone, loudspeaker and call button</p>  <p>Incl. 3 m cable</p> <p>Order No 200 165 silver</p> |
|---|--|---|--|

OR YOU CAN COMBINE THE EXTENSION(S) WITH A MICROPHONE

| | | | |
|---|---|---|--|
| <p>Ø 12 mm</p>  <p>Incl. 3 m cable</p> <p>Order No 200 200</p> | <p>60 x 60 mm</p>  <p>Incl. 3 m cable</p> <p>Order No 200 206 silver</p> | <p>Built-In Microphone with cover plate</p> <p>120</p> <p>120</p> <p>65</p>  <p>Incl. 3 m cable</p> <p>Order No 200 210 silver</p> | <p>Three Panel Strip with microphone</p> <p>19</p> <p>200</p> <p>42</p>  <p>Incl. 3 m cable</p> <p>Order No 200 215 silver</p> |
|---|---|---|--|

AND A LOUDSPEAKER

| | | | |
|--|---|--|---|
| <p>Built-In Loudspeaker</p> <p>Ø 80 mm</p>  <p>Incl. 3 m cable</p> <p>Order No 200 220</p> | <p>Ceiling Loudspeaker for installation</p> <p>Ø 105 mm</p>  <p>Incl. 3 m cable</p> <p>Order No 200 226 white</p> | <p>Built-In Loudspeaker with cover plate</p> <p>120</p> <p>120</p> <p>65</p>  <p>Incl. 3 m cable</p> <p>Order No 200 228 silver</p> | <p>Three Panel Strip with loudspeaker</p> <p>19</p> <p>200</p> <p>42</p>  <p>Incl. 3 m cable</p> <p>Order No 200 233 silver</p> |
|--|---|--|---|

If single components are used for the customer side extensions (separate microphone and separate loudspeaker), then a distribution box - Order No 200 180 - is required.

DELTA 2.0, Optimum Communication at Glazed Counters

**Precise voice transmission
by intelligent processors
and high quality components.
Intuitive Operation.**





INSTALLATION INSTRUCTIONS

Qualified personnel are not required for installation.

All components are equipped with plugs.

No adjustments are necessary.

The microphones should, if possible, be installed at speech level - the loudspeakers should not be installed directly beside the microphone, or directly opposite.

Best results can be achieved if single components are installed as far away as possible from each other.

We would be happy to assist during your project planning.

TECHNICAL DATA

Connection 100- 240 Volts / 50- 60 Hz

Operating Voltage 12 Volts / DC

Power 4 Watts per channel

Non-volatile memory

(all modified settings remain stored even after a power failure)

Feedback suppression

SPECIAL SOLUTIONS

We can, of course, also adapt the components to suit special conditions.


Please just ask!

DELTA 2.0

The Delta 2.0 intercom was developed in Germany and is fully manufactured in Germany.

Version 8.2012

Technical changes and further developments are reserved.

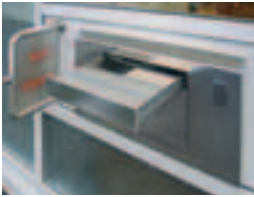

Other SITEC products:

Pass-Throughs
Front-Opening Counters
Money- and Material Locks



Entrance Systems
Personnel Locks
Entrance Controls



Fast-Rising Security Counters
Glazed Counters
Cash Boxes



Mobile Banks
Self-Service Bank Pavilions
Guardhouses



**Break-In, Bullet-
and Fire-Resistant**
Doors and Partition Walls



Pressed Parts
Laser Parts
Welded and Metal Constructions



Sales
Finland
Kuninkaanmäentie 120B
01260 Vantaa
+358 40 9008520
info@johnberger.fi
www.johnberger.fi

Estonia
Laki 9A
10621 Tallinn
+372 +372 654 6604
info@johnberger.ee
www.johnberger.ee