

EXPLANATIONS

ALL MEASURES ARE IN MILLIMETERS.

NOTES

THE SLIDING WINDOW SHALL BE TYPE AH50, SVALSON AB SWEDEN (+46 911 66725).

CONSTRUCTION

MOTOR, TRANSMISSION AND AUTOMATIC LOCKING SHALL BE PLACED WITHIN THE FRAME.

LOCKING

THE SLIDING WINDOW SHALL BE LOCKED AUTOMATICALLY IN CLOSED POSITION. (LOCKING IN 50 mm INTERVAL IS OPTIONAL.)

FINISH


THE ALUMINIUMPROFILES SHALL BE SATIN ANODISED. (OR ANY OTHER FINISH, FOR INSTANCE COLOR COATED OR ANODISED IN OTHER COLORS.)

GLAS

8 mm LAMINATEDGLASS.
(OR OTHER TYPE OF GLASS WITH A MAXIMUM THICKNESS OF 9.5 mm.)

OPENINGSPEED

THE OPENINGSPEED OF THE SLIDING WINDOW IS APPROX. 200 mm/SECOND.

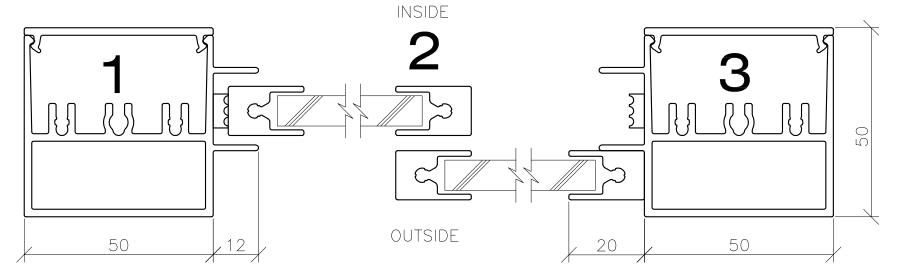



SLIDING WINDOW

REV TYPE OF REVISION

TYPE AH50

DRAWN/DESIGN | SCALE

1:10, 1:1

VIEW FROM OUTSIDE VIEW FRIOM INSIDE

DATE

SIGN

DD.MM.YY DRAWING NUMBER AH50.