


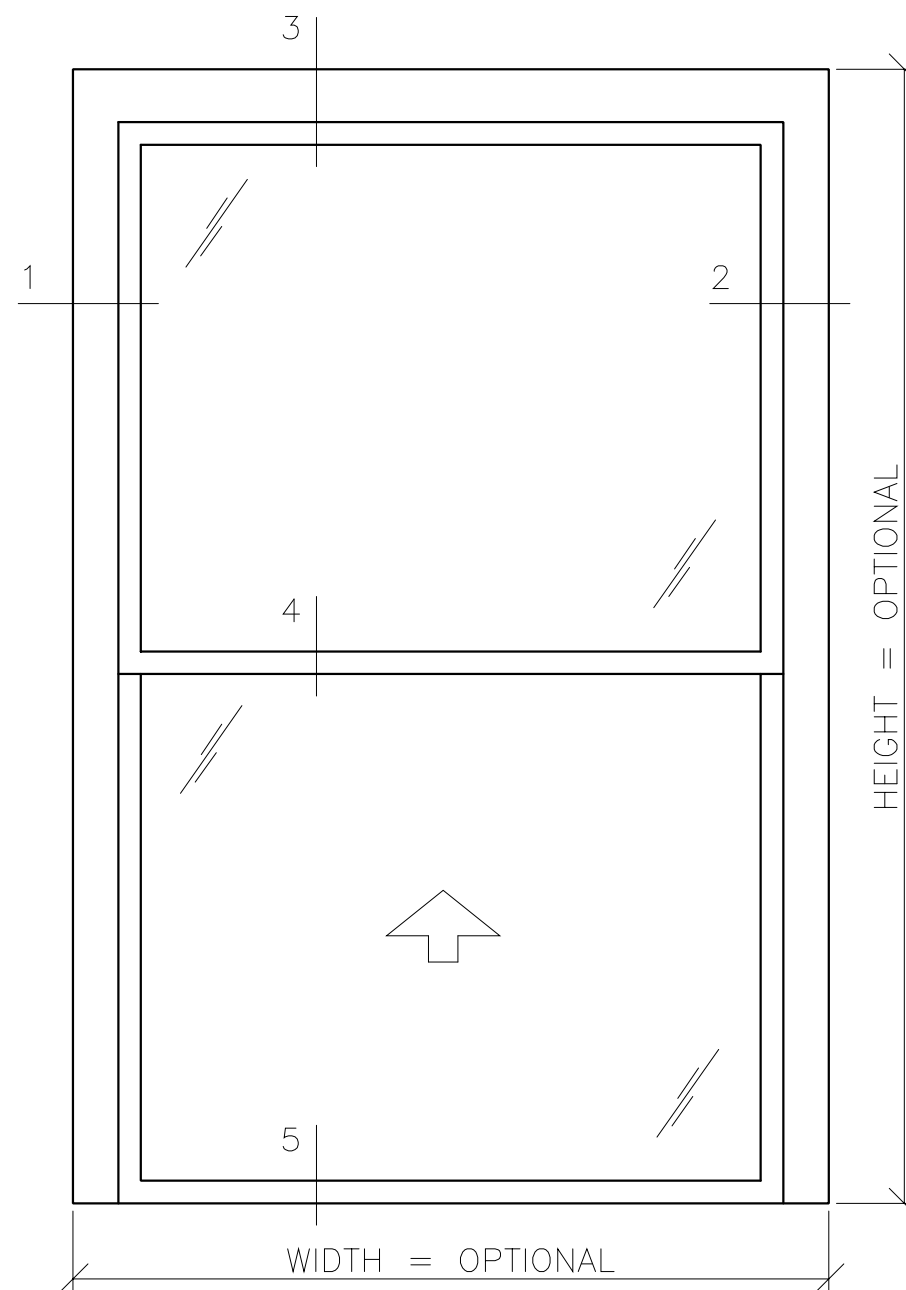

EXPLANATIONS
ALL MEASURES ARE IN
MILLIMETERS.

NOTES
THE SLIDING WINDOW SHALL BE
TYPE 9018, SVALSON AB
SWEDEN (+46 911 66725).

CONSTRUCTION
MOTOR, TRANSMISSION AND
AUTOMATIC LOCKING SHALL
BE PLACED WITHIN THE FRAME.

LOCKING
THE SLIDING WINDOW SHALL BE
LOCKED AUTOMATICALLY IN
CLOSED POSITION. (LOCKING
IN 50 mm INTERVAL IS
OPTIONAL.)

FINISH
THE ALUMINIUMPROFILES SHALL
BE SATIN ANODISED. (OR ANY
OTHER FINISH, FOR INSTANCE
COLOUR COATED OR ANODISED
IN OTHER COLOURS.)

GLASS
DOUBLE GLAZING 4-12-4. (OR
ANY OTHER TYPE OF GLASS
WITH A MAXIMUM THICKNESS OF
20 mm. FOR INSTANCE 14 mm
LAMINATED GLASS CLASS P6B.)

OPENINGSPEED
THE OPENINGSPEED OF THE
SLIDING WINDOW IS APPROX.
200 mm/SECOND.


REV	REVISION	REFERS TO	DATE	SIGN
-----	----------	-----------	------	------



SVALSON AB
Phone +46 911-66725
Telefax +46 911-66680
<http://www.svalson.com>
Box 584
S-943 28 Öjebyn
SWEDEN

SLIDING WINDOW
TYPE 9018 **AV90**

DRAWN/DESIGN — —	SCALE 1:1	VIEW FROM OUTSIDE VIEW FROM INSIDE	☒
DATE DD.MM.YY	DRAWING NUMBER 9018. A	REV	

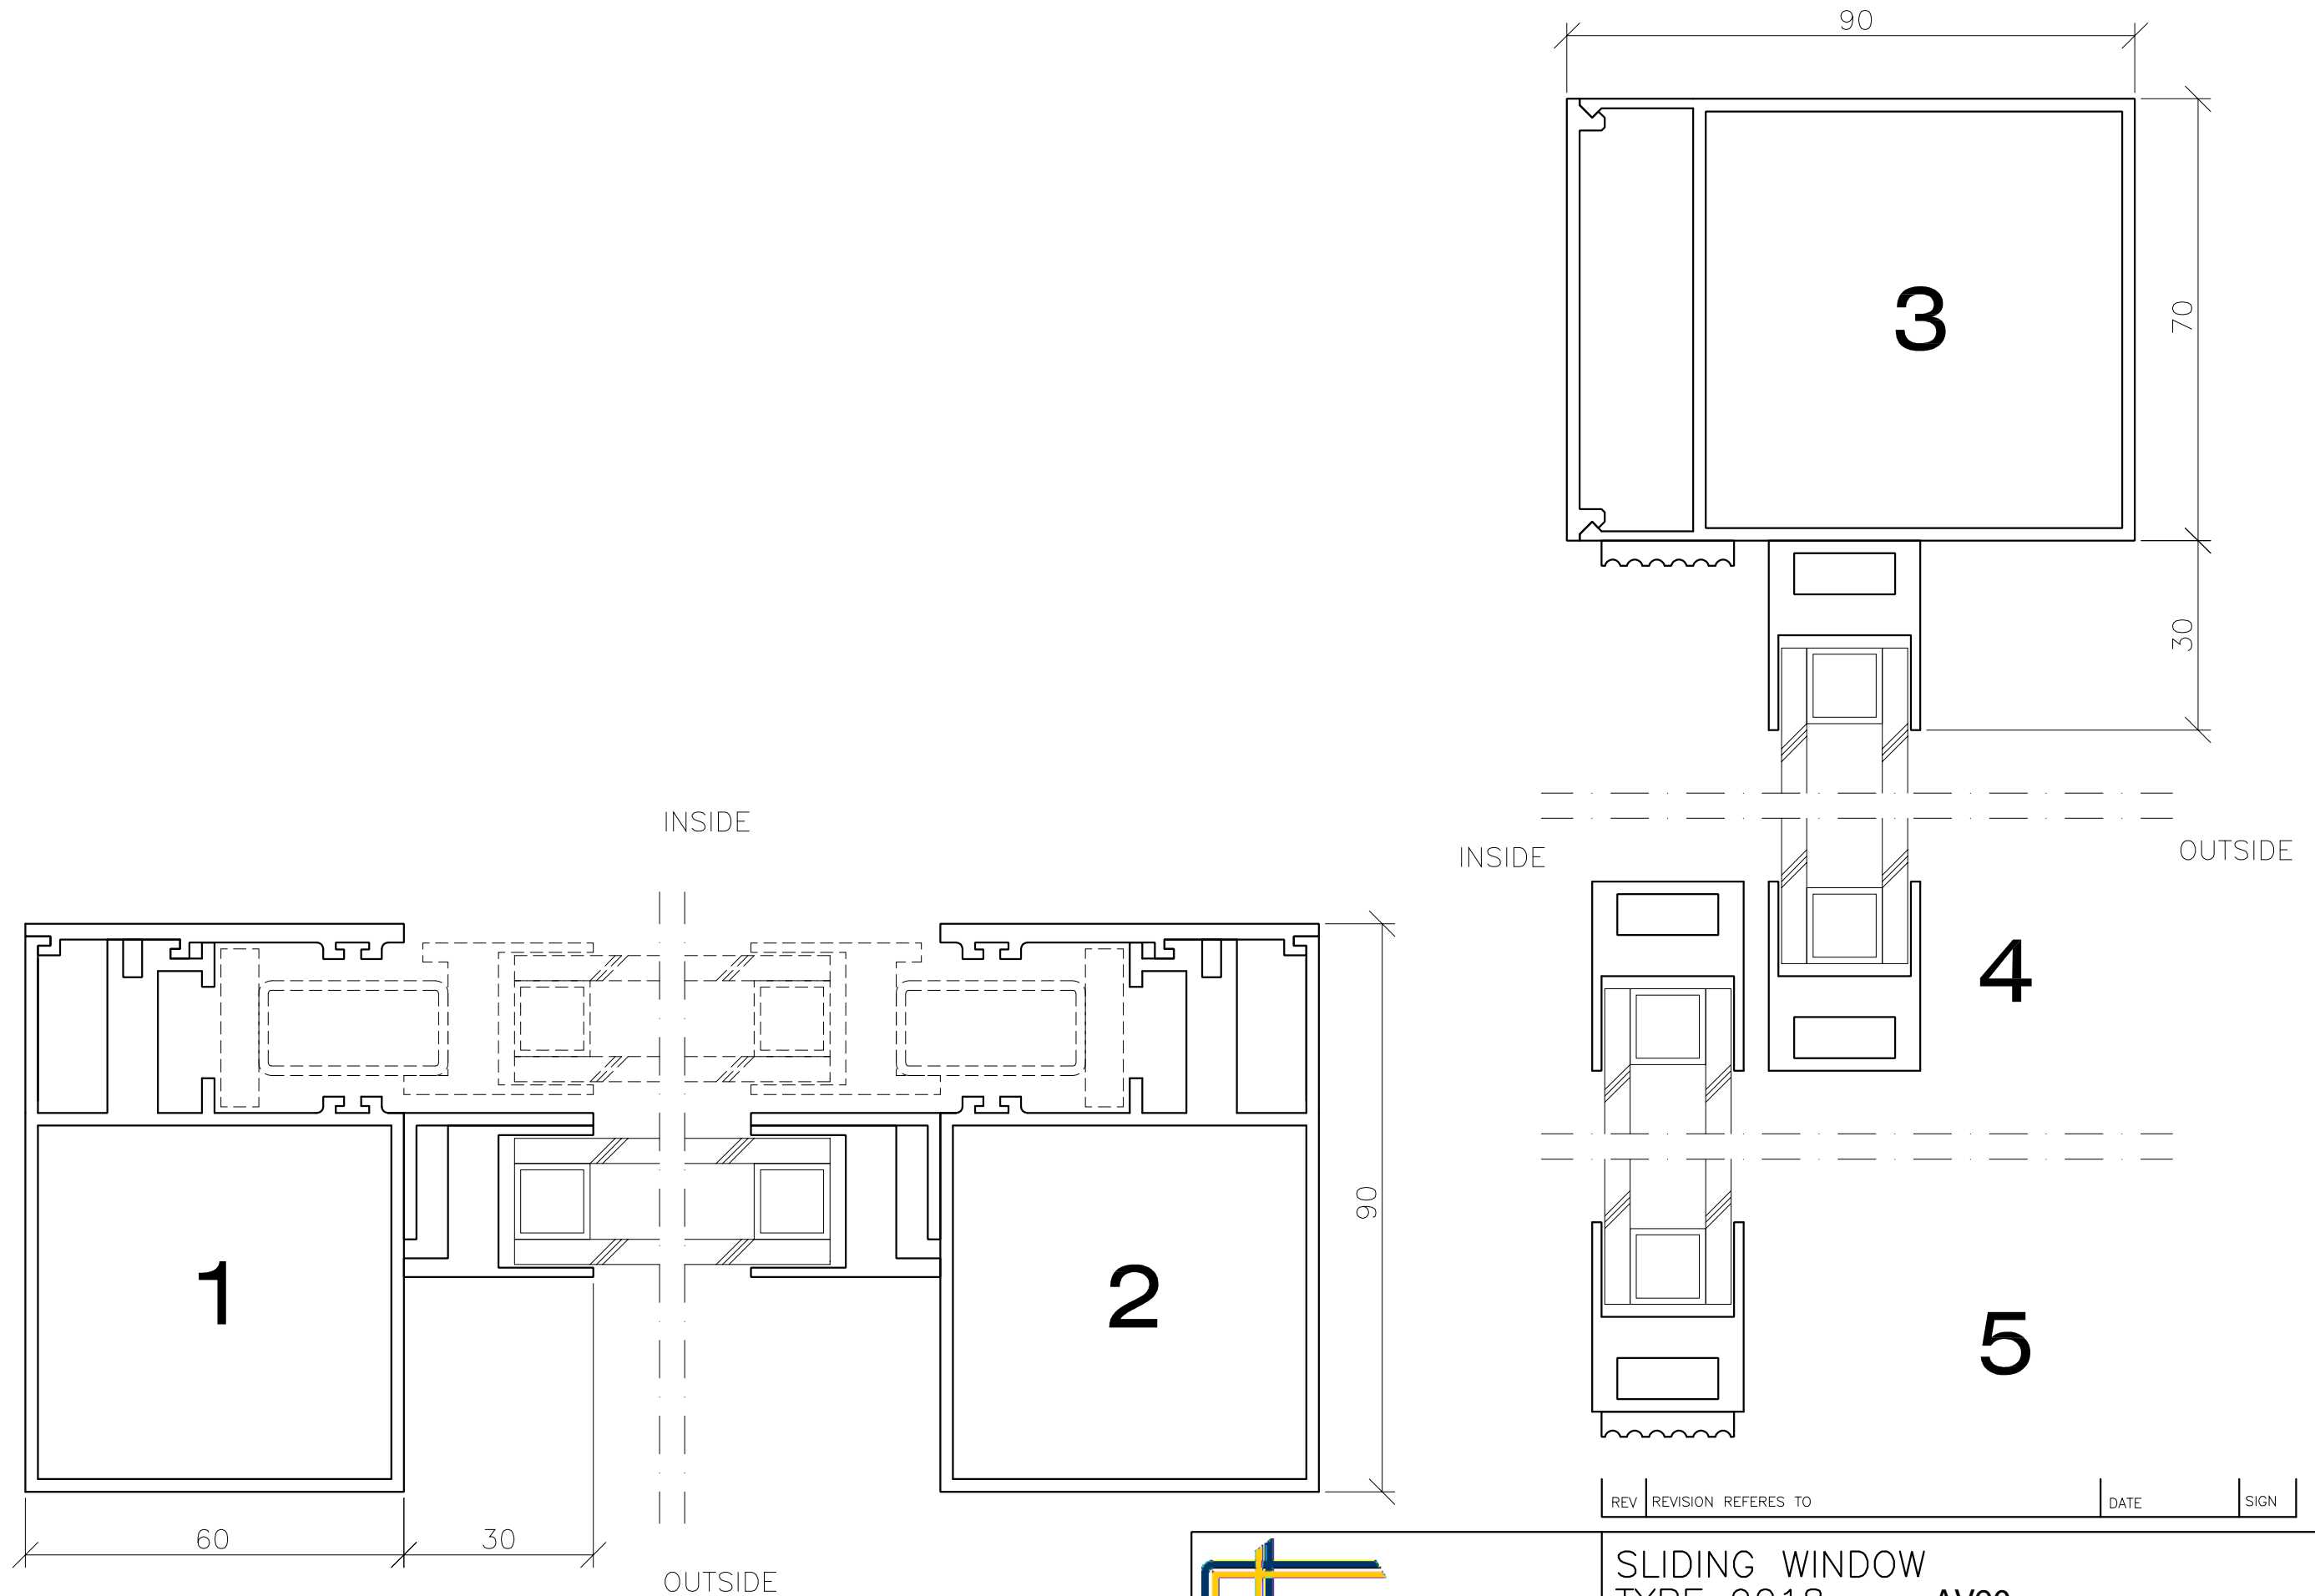

SLIDING WINDOW TYPE 9018		AV90	
DRAWN/DESIGN --	SCALE 1:1	VIEW FROM OUTSIDE VIEW FROM INSIDE	☒
DATE DD.MM.YY	DRAWING NUMBER 9018. A	REV	